hireworx Your one stop hire shop

DIESEL SCISSOR LIFT



Hireworx Diesel Scissor Lift

SPECIFICATIONS


MODELS	1981845-0-207	W 9500
Measurements	Metric	Imperial
Work Height Max.	17.9m	58'9"
Platform Height - Raised	15.9m	52'2"
Platform Height - Stowed	2.08m	6'10"
Platform Length	3.98/4.81m	13'1"/15'9"
Platform Width	1.83m	6'
Overall Length (with ladder)	4.9m	16'1"
Overall Width	2.3m	7'7"
Overall Height - Rails up	3.18m	10'5"
Overall Height - Rails down	2.5m	8'2"
Extension Deck (Front / Rear)	1.45/1.14m	4'9"/3'9"
Wheelbase	2.85m	9'4"
Ground Clearance-Center	0.23m	9"
PRODUCTIVITY		
Max. Platform Occupancy	4(in) / 4(out)	
Platform Capacity	680kg	1500 lbs
Platform Capacity - Extension	230kg	510 lbs
Drive Height	8.5m	27'11"
Gradeability - Stowed	40%	
Min. Turning Radius	5.33m	17'6"
Raise/Lower Speed	55 / 55s	
Brakes	Four-wheel brake	
Drive Mode	4x4	
Tires Type	Solid	
Tires Size	835x290mm	33"x11"
POWER		
Power Source	Deutz D2.9 L4 36.4kw/48.8hp	
Fuel Tank Capacity	110L	30gal
HYDRAULIC SYSTEM	A AMELIAN-	
Hydraulic Oil Volume	140L	37gal
WEIGHT		-
	100000000000000000000000000000000000000	


8200kg

18080 lbs

STANDARD FEATURE	ES .
Proportional control	Tilt alarm with lift cut-out
Foldable guardrail	Overload sensing system
Emergency stop device	Descent alarm with flashing beacon
Manual brake release	All motions alarm
Emergency descent	Intelligent diagnostic system
Oscillating axle	Auto-leveling outriggers
Self-lock entry gate	Solid tires

OPTIONAL	
Telematics	Pipe racks
AC power to platform	Solid non-marking tires
Cold weather package	Foam-filled tires
Biodegradable hydraulic oil	Foam-filled non-marking tires

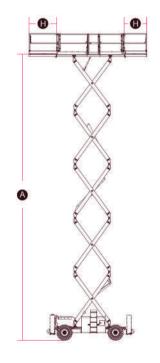



0800 86 22 44 www.hireworx.co.nz

Machine Weight (7.4m platform, CE)

