

hireworx

Your one stop hire shop

TELEHANDLER

6m

WORKING HEIGHT

2500kg

RATED LOAD



Hireworx Telehandler

SPECIFICATIONS

MODELS

Measurements	Metric	Imperial
A Max. Lifting Height	5.94m	19'6"
Max. Outreach	3.41m	11'2"
B Overall Length	3.99m	13'1"
C Overall Width	1.86m	6'1"
D Overall Height	1.97m	6'6"
E Wheelbase	2.3m	7'7"
Ground Clearance	0.32m	1'1"

PRODUCTIVITY

Max. Capacity	2,500kg	5512 lbs
Gradeability-Unladen	45%	
Min. Turning Radius	3.36m	11'
Tilt Angle	±5°	
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	9s	
Primary Boom Descending Time	6.5s	
Boom Extending Time	6s	
Boom Retracting Time	4s	
Forward - First Gear Travel Speed	10km/h	6.2mph
Forward - Second Gear Travel Speed	24.9km/h	15.5mph
Backward - First Gear Travel Speed	10km/h	6.2mph
Backward - Second Gear Travel Speed	24.9km/h	15.5mph
Service brake	Multi-disc wet brake of front axle	
Standard Tyres	12-16.5-12-TL	

ENGINE


Manufacturer	Kubota	
Rated Power	54.6kW	73.2hp
Max. Torque	261.1N.m	192.6 lb.ft
Displacement	3,331ml	203.3 cu.in
Fuel Tank Capacity	63L	16.6 gal
Maximum traction force	39kN	

HYDRAULIC SYSTEM


Working pump displacement	84 l/min	22 US gpm
Hydraulic Oil Capacity	75L	19.8 gal

WEIGHT

Machine Weight	5,050kg	11,134 lbs
----------------	---------	------------

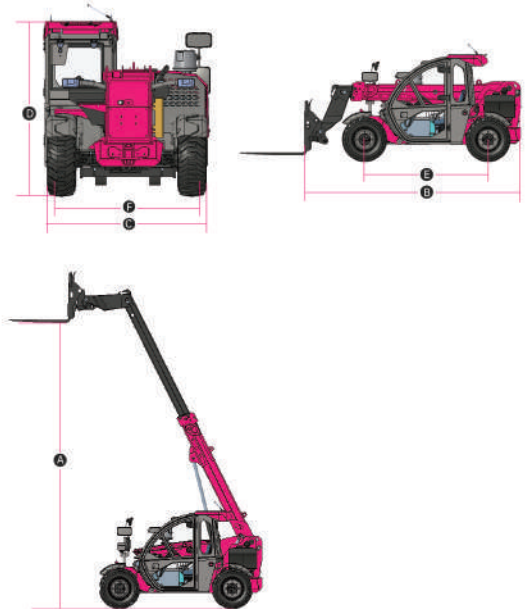

ROUGH TERRAIN LOAD CHART

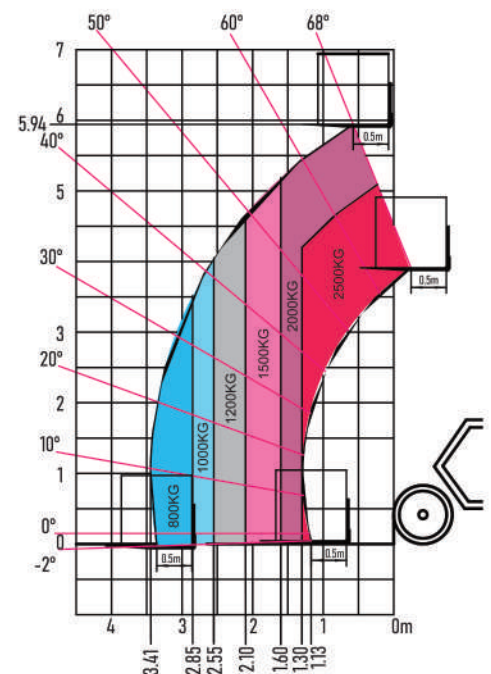

0800 86 22 44
www.hireworx.co.nz

hireworx
 Your one stop hire shop